



Take off...

precision for professionals

PROMOTION
Valid until 31.08.2012

DIGI-MET® Pocket caliper 1226 for specific measuring tasks

HP



Wall thickness pocket caliper
1226 918



Scribing / marking pocket caliper
1226 912



Point type pocket caliper
1226 916



Long, thin measuring jaws
1226 930



Blade type pocket caliper
1226 920



Pointed measuring jaws
1226 922

Specification

- Protection class IP 67
- Stainless steel
- LCD display 7.5 mm
- Measuring system is insensitive to cooling agents and dust
- Factory standard
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Packaging: Wooden case

Functions

- ON/OFF switch
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)

			Measuring range		Jaw length		Reading		Ref. No.	List price
			mm	inch	mm	inch	mm	inch		Euro
Wall thickness pocket caliper										
•			0 - 150	0 - 6	40	1.57	0.01	.0005	1226 918	439.00
With long narrow measuring jaws										
•			10 - 200	4 - 8	60	2.36	0.01	.0005	1226 930	569.00
Scribing / marking pocket caliper / with carbide tipped jaws										
•			0 - 200	0 - 8	33 / 40	1.29 / 1.57	0.01	.0005	1226 912	249.00
Blade type pocket caliper										
•			0 - 150	0 - 6	40	1.57	0.01	.0005	1226 920	475.00
Point type pocket caliper										
•			0 - 150	0 - 6	40	1.57	0.01	.0005	1226 916	345.00
Pocket caliper with pointed measuring jaws										
•			0 - 150	0 - 6	40	1.57	0.01	.0005	1226 922	389.00

Accessories

	Ref. No.	List price
		Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.40

DIGI-MET® Pocket caliper 1226 for specific measuring tasks



Adjustable measuring jaws
1226 928



Inwardly angled anvils
1226 904



Outwardly angled anvils
1226 906



Bore hole distance measurement
1226 924



Inwardly angled measuring jaws
1226 908



Outwardly angled measuring jaws
1226 910

Specification

- Protection class IP 67
- Stainless steel
- LCD display 7.5 mm
- Measuring system is insensitive to cooling agents and dust
- Factory standard
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Packaging: Wooden case

Functions

- ON/OFF switch
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)

		Measuring range		Jaw length		Reading		Ref. No.	List price
		mm	inch	mm	inch	mm	inch		Euro
Offset type pocket caliper with adjustable measuring jaws + inside cross points									
•		0 - 200	0 - 8	65 / 50	2.55 / 1.96	0.01	.0005	1226 928	415.00
Offset centreline pocket caliper with adjustable measuring jaws ideal for bore hole distance measurement									
•		10 - 210	.4 - 8.3	75 / 30	2.95 / 1.18	0.01	.0005	1226 924	385.00
Inwardly angled anvils									
•		0 - 150	0 - 6	40	1.57	0.01	.0005	1226 904	499.00
Inwardly angled measuring jaws									
•		0 - 150	0 - 6	40	1.57	0.01	.0005	1226 908	425.00
Outwardly angled anvils									
•		20 - 170	.8 - 6.7	40	1.57	0.01	.0005	1226 906	495.00
Outwardly angled measuring jaws									
•		10 - 160	.4 - 6.3	40	1.57	0.01	.0005	1226 910	489.00

Accessories	Ref. No.	List price
Battery, 3V-Lithium, CR 2032	0220 704	Euro 3.40

DIGI-MET® pocket caliper

PROMOTION

HP



Pocket caliper 1220



Pocket caliper 1226

Specification 1220

- Inductive measuring system, resistant to damp and sweat
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm
- Packaging: Plastic case

Electronic Functions 1220

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- mm/inch conversion
- Zero setting at any position
- Variable data output RS 232 + Digimatic + USB

Specification 1226

- Protection class IP 67
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Meas. system is insensitive to cooling agents and dust
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm
- Packaging: Plastic case

Electronic Functions 1226

- ON/OFF switch
- **QuickLock** Function
- mm/inch conversion
- Zero setting at any position


			Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	Promotion price
			mm	inch	mm	inch	mm	inch			Euro
without DATA OUTPUT											
•	•		150	6	40	1.57	0.01	.0005	round	1220 416	79.00
•	•		150	6	40	1.57	0.01	.0005	rectangular	1220 417	79.00
with DATA OUTPUT											
•	•		150	6	40	1.57	0.01	.0005	round	1220 516	95.00
•	•		150	6	40	1.57	0.01	.0005	rectangular	1220 517	95.00
•			200	8	40	1.57	0.01	.0005	rectangular	1220 519	145.00
•			300	12	60	2.34	0.01	.0005	without	1220 522	195.00
with IP-Protection											
•	•		150	6	40	1.57	0.01	.0005	round	1226 416	115.00
•	•		150	6	40	1.57	0.01	.0005	rectangular	1226 417	115.00
•	•		200	8	50	2.00	0.01	.0005	rectangular	1226 418	165.00
•	•		300	12	65	2.50	0.01	.0005	without	1226 422	215.00

Accessories for: 1220 and 1222

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.40
Cable for USB, incl. Software	1998 720	62.00
Cable for RS 232	1997 501	43.60
Cable for Digimatic	1998 501	43.60



DIGI-MET® PRISMA pocket caliper 1222



Specification

- Double prismatic guidance
- Stainless steel
- DIN 862
- LCD display 7.5 mm
- Locking screw
- Inside cross points
- Four way measurement
- Packaging: Wooden case

Electronic Functions



- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

			Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
			mm	inch	mm	inch	mm	inch			
•	•		150	6	40	1.57	0.01	.0005	round dia. 1.5	1222 516	167.00

Accessories: See page 4

DIGI-MET® Universal caliper 0226

PROMOTION

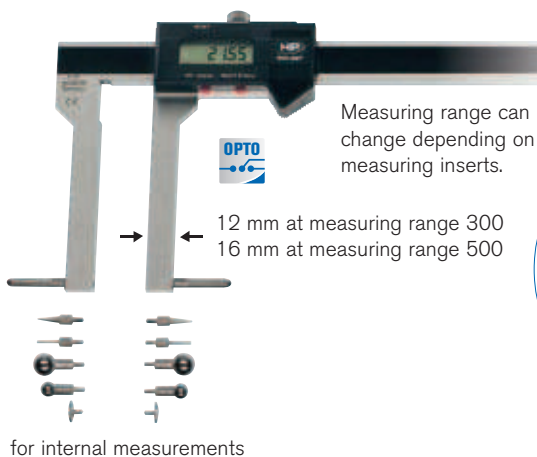

Specification

- Stainless steel
- Factory standard
- LCD display 6 mm
- Locking screw
- Suitable for all measuring inserts with a M 2.5 mm thread
- Packaging: Wooden case

Electronic functions

- ON/OFF switch
- Zero setting at any position
- mm/inch conversion
- Data output Opto RS 232
- Hold Function
- PRESET Function (setting a numerical value)

			Measuring range		Jaw length		Reading		Ref. No.	List price Euro
			mm	inch	mm	inch	mm	inch		
•			300	12	90	3.5	0.01	.0005	601111 0226 701	496.00
•			500	20	100	4.0	0.01	.0005	601111 0226 702	642.00

**Free
Accessories**

Included in delivery

	Ref. No.
Pair of special steel measuring inserts - disc shape dia. 10.0 mm	0710 163
Pair of special steel measuring inserts - cylindrical dia. 1.5 mm	0710 165
Pair of special steel measuring inserts - conical dia. 3.5 mm / 0.5 mm	0710 166
Pair of special steel measuring inserts - with ball inserts	0710 167
Pair of special steel measuring inserts - ball dia. 7.0 mm	0710 181
Pair of special steel measuring inserts - ball dia. 10.0 mm	0710 187

Micrometers

HP



DIN 863-1

External micrometer 0806



DIN 863-3

Micrometer 0854



DIN 863-3

Blade micrometer 0855

Specification 0806

- DIN 863-1
- Reading: 0.01 mm
- Reading parts are satin chrome plated
- Locking lever
- Ratchet stop
- Carbide measuring faces
- Thermally insulated
- Coated steel frame
- Packaging: Plastic case
- From measuring range 25 - 50 mm upwards includes a setting standard

Specification 0854

- DIN 863-3
- Reading: 0.01 mm
- Reading parts are satin chrome plated
- Ratchet stop
- Thermally insulated
- Hardened spindle and anvil
- Coated steel frame
- Packaging: Plastic case
- From measuring range 25 - 50 mm upwards includes a setting standard

Specification 0855

- DIN 863-3
- Reading: 0.01 mm
- Reading parts are satin chrome plated
- Locking lever
- Ratchet stop
- Carbide measuring faces
- Thermally insulated
- Hardened spindle and anvil
- Coated steel frame
- Packaging: Plastic case
- From measuring range 25 - 50 mm upwards includes a setting standard

			Measuring range mm	Spindle dia. mm	Thimble dia. mm	Pitch mm	Ref. No.	List price Euro
External micrometer 0806								
•			0 - 25	6.5	17.5	0.5	0806 521	40.70
•			25 - 50	6.5	17.5	0.5	0806 522	64.00
•			50 - 75	6.5	17.5	0.5	0806 523	79.00
•			75 - 100	6.5	17.5	0.5	0806 524	91.00
Micrometer with reduced measuring faces 0854 - Measuring faces dia. 0.8 x 7 mm								
•			0 - 25	8.0	17.5	0.5	0854 301	224.00
•			25 - 50	8.0	17.5	0.5	0854 302	272.00
Blade micrometer 0855 - Measuring faces dia. 3 mm, length 8.5 mm								
•			0 - 25	6.5	17.5	0.5	0855 301	161.00
•			25 - 50	6.5	17.5	0.5	0855 302	198.00

Set of external micrometers 0806

HP



Specification

- 4 external micrometers
- Setting standards 25 mm + 75 mm or 125 mm + 175 mm
- Packaging: Wooden case

			Measuring range mm	Spindle dia. mm	Thimble dia. mm	Pitch mm	Ref. No.	List price Euro
•			0 - 100	6.5	20.5	17.5	0806 540	240.00
•			100 - 200	6.5	20.5	17.5	0806 542	527.00

Height and scribing gauge 0336



Specification

- Hardened cast base
- Upper surface of the base is ground
- With dust grooves
- Measuring beam special steel
- Vernier and scale are satin chrome plated
- Parallax free reading
- Fine adjustment
- Locking screw
- With a mounting arm for dial gauges dia. 8 mm H7
- Interchangeable carbide tipped scribers
- Factory standard
- Packaging: Individually packed

				Measuring range mm	Measuring beam mm	Reading mm	Ref. No.	List price Euro
Base 60 x 40 x 100 mm								
•				300	25 x 6	0.02	0336 301	367.00
Base 110 x 50 x 160 mm								
•				600	30 x 12	0.02	0336 302	506.00
•				1000	30 x 12	0.02	0336 304	1.117.00

DIGI-MET® Height and scribing gauge 0342



Specification

- Hardened cast base
- Upper surface of the base is ground
- With dust grooves
- Special steel
- LCD-display 6 mm
- Factory standard
- Locking screw
- With a mounting arm for dial gauges dia. 8 mm H7
- Interchangeable carbide tipped scribers
- Fine adjustment
- Packaging: Individually packed

Functions

- ON/OFF switch
- Zero setting at any position
- mm/inch conversion
- Data output Opto RS 232
- Hold Function
- PRESET Function (setting a numerical value)

Replacement scriber for 0340 and 0342



				Length mm	Ref. No.	List price Euro
for measuring range 300 mm						
•				65	0334 101	65.00
for measuring range 600 mm + 1000 mm						
•				75	0334 102	108.00

Specification



- Carbide tipped
- Packaging: Individually packed

				Measuring range		Measuring beam		Reading		Ref. No.	List price Euro
				mm	inch	mm	inch	mm	inch		
Base 60 x 10 x 100 mm											
•				300	12	25 x 10	1.0 x .24	0.01	.0005	0342 701	684.00
Base 110 x 50 x 160 mm											
•				600	24	30 x 12	1.18 x .47	0.01	.0005	0342 702	760.00

Universal bevel protractor with magnifying lense 0422




Specification

- Locking screw
- Stainless steel
- Factory standard
- Fine adjustment screw
- Parallax free reading
- Reading parts satin chrome plated
- Vernier scale reading 5 minutes
- Hardened beam
- Packaging: Wooden case

			Segment	Blade mm	Ref. No.	List price Euro
•			4 x 90°	150	0422 501	105.00
•			4 x 90°	200	0422 502	124.00
•			4 x 90°	300	0422 503	127.00

Protractor 0411

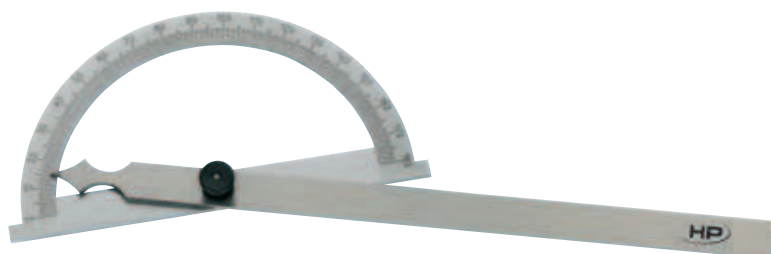

Specification

- Locking screw
- High precision, laser graduated degree scale
- Factory standard
- 0 - 180°
- Packaging: Cardboard box, from 300 mm the protractor is individually packed

			Graduated arc dia. mm	Pointer arm mm	Ref. No.	List price Euro
•			80	120	0411 301	21.80
•			120	150	0411 302	28.10
•			150	200	0411 303	31.30
•			200	300	0411 304	44.90
•			300	500	0411 305	63.00



- We reserve the right to revise prices and alter designs as necessary, without notice
- Illustrations and descriptions are valid at the time of going to press
- We reserve the express right to introduce changes without notice
- Illustrations and weights are not binding
- All mentioned prices exclude the statutory value added tax (V.A.T.)
- All shipments are ex-works, exclusive of packing. Except where otherwise quoted.
- No part of this promotion may be reproduced and/or duplicated, stored in a retrieval system, transmitted in any form or by means of electronic, mechanical, recording or otherwise, without the expressed prior written permission of HELIOS • PREISSER.